


# JENBACHER TYPE 3

## Hot & Humid countries Efficient, durable, reliable

Long service intervals, maintenance-friendly engine design and low fuel consumption ensure maximum efficiency in our type 3 Jenbacher engines. Enhanced components prolong service life even when using non-pipeline gases, such as landfill gas. Our type 3 engines offer an outstanding service interval with up to 80,000 operating hours until the major overhaul. This engine type stands out in its 400 to 1,100 kW power range due to its technical maturity and high degree of reliability.

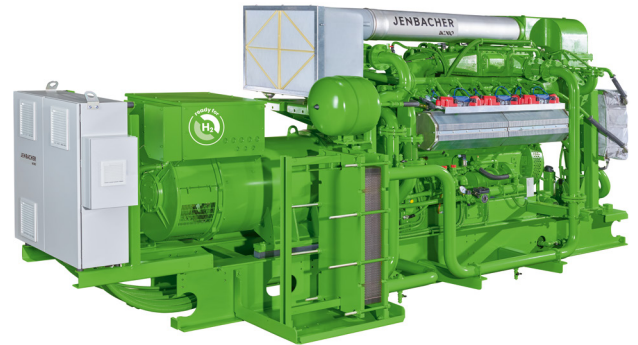

### Reference installations

#### J320 Wangdee Biogas Power Plant, Thailand

Energy source	Engine type	Electrical output	Commissioning
Biogas	4 x J320	4.27 MW	2015, 2021, 2023

Centered on four Jenbacher J320 engines running on biogas, the plant uses wastewater and solid waste of the raw cassava roots process to generate electricity. The biogas power plant delivers 4.27 MW of output, which is more than enough to supply all the electricity needed for the processing plant. Therefore, the facility can earn extra profits by selling excess power back to the local grid.



#### J320 Arif Habib Group Business Building, Karachi, Pakistan

Energy source	Engine type	Electrical output	Thermal output	Commissioning
Pipeline gas	1 x J208 1 x J320	1.4 MW	540 kW	2009

Two Jenbacher generator sets generate 1,394 kW of electricity for the headquarters of the Arif Habib Group, a business conglomerate company based in Karachi. The J320 exhaust gas is used to run an absorption chiller, producing 100 USRT.



#### J320 K&C Valley Sewage Treatment Plant, India

Energy source	Engine type	Electrical output	Thermal output	Commissioning
Sewage gas	1 x J320	1.1 MW	1.15 MW	2018

A combined heat and power (CHP) plant offset the need for K&C Valley sewage treatment plant to buy power from the grid by providing the heat and power needed to treat an average of 41.83 million liters of water per day from May 2018 to July 2022. Key to the 1,067 kWel power plant's success is the proven Jenbacher J320 engine, which runs on sewage gas to generate power for the plant and recovers the exhaust flue gas waste heat for use in the plant's wastewater treatment process.



#### J320 Changsha Xiangjiang Happy City Distributed Energy Project, China

Energy source	Engine type	Electrical output	Thermal output	Commissioning
Pipeline gas	2 x J320	2 MW	2.28 MW	2019

The new Changsha Xiangjiang Happy City Distributed Energy project is supporting the region's energy transition from coal-burning plants to more environmentally friendly solutions. The combined cooling, heat, and power (CCHP) plant is centered on two 1 MW Jenbacher J320 gensets operating on pipeline gas. The plant supplies electricity, heat, and cooling to the resort, which has a total construction area of about 277,000 square meters.



## Technical data

Configuration	V 70°		
Bore (mm)	135		
Stroke (mm)	170		
Displacement / cylinder (lit)	2.43		
Speed (rpm)	1,500 (50 Hz)		
	1,200 / 1,800 (60 Hz)		
Mean piston speed (m/s)	8.5 (1,500 l/min)		
	6.8 (1,200 l/min)		
	10.2 (1,800 l/min)		
Scope of supply	Generator set, cogeneration system, generator set / cogeneration in container		
Applicable gas types	Natural gas, flare gas, propane, biogas, landfill gas, sewage gas, special gases (e.g., coal mine gas, coke gas, wood gas, pyrolysis gas)		
Engine type	J312	J316	J320
No. of cylinders	12	16	20
Total displacement (lit)	29.2	38.9	48.7

### Dimensions l x w x h (mm)

Generator set	J312	4,700 x 1,800 x 2,300
	J316	5,200 x 1,800 x 2,300
	J320	5,700 x 1,700 x 2,300
Cogeneration system	J312	4,700 x 2,300 x 2,300
	J316	5,300 x 2,300 x 2,300
	J320	5,700 x 1,900 x 2,300
Container 40-foot	J312	12,200 x 2,500 x 2,600
	J316	12,200 x 2,500 x 2,600
	J320	12,200 x 2,500 x 2,600

### Weights empty (kg)

Generator set	J312	8,100
	J316	10,100
	J320	13,900
Cogeneration system	J312	9,500
	J316	11,200
	J320	14,400

## Outputs and efficiencies

### Natural gas

### 1,500 l/min | 50 Hz

NO <sub>x</sub> <	Type	Pel (kW) <sup>1</sup>	Pth (kW) <sup>3</sup>	Heat rate (kJ/kWhe) <sup>2</sup>	ηel (%) <sup>2</sup>	ηth (%)	ηtot (%)
500 mg/m <sup>3</sup> <sub>N</sub>	J312	635	680	8,532	42.2	45.2	87.4
	J316	851	935	8,604	41.9	46.0	87.9
	J320	1,067	1,276	9,000	40.0	47.8	87.8
	J320	999	1,102	8,604	41.8	46.1	87.9
	J320	1,067	1,169	8,568	42.0	46.1	88.1

<sup>1</sup> Type 3 gas engine with site condition ≤ 50m above sea level and T1 ≤ 40°C

<sup>2</sup> Technical data according to ISO 3046

<sup>3</sup> Total heat output @ hot water 90°C - 70°C

All data according to full load and subject to technical development and modification.

Further engine versions available on request.




Contact us:  
[jenbacher.com/en/contact](http://jenbacher.com/en/contact)  
[jenbacher.com/en](http://jenbacher.com/en)

I JB-1 22 003-EN-HH

In general, "Ready for H<sub>2</sub>" Jenbacher units can be converted to operate on up to 100% hydrogen in the future. Details on the cost and timeline for a future conversion may vary and need to be clarified individually.

© Copyright 2023 INNIO. Information provided is subject to change without notice.

INNIO, INNIO, Jenbacher,  are trademarks in the European Union or elsewhere owned by INNIO Jenbacher GmbH & Co OG or one of its affiliates. All other trademarks and company names are property of their respective owners. Jenbacher is part of the INNIO Group

# JENBACHER